



Tubular Bells Pro Wall

Luminaire for wall mounting with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.

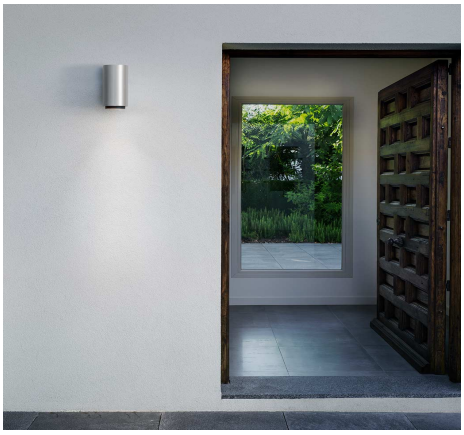




Luminous flux luminaire
412 lm (EXTREME CUT OFF)

Beam Angle: 21°

h(m)	E(lx)	D(m)
1	2341	0.38
2	585	0.75
3	260	1.13
4	146	1.50
5	94	1.88



Number of heads	1
Mountings	Wall surface
Lamp categories	LED
Power (W)	7.4W
Colour temperature	3000K
CRI	98
Lumen	412 lm
Voltage (V)	220.00
Environments	Indoor
Orientations	Fixed
Light Distributions	Symmetric
Beam Angle	21
Driver	Integrated
Transformer Type	Electronic
Frequency	50/60
Emergency	Without
Lamp Holder	LED
Dimmable	No

Colors

- 07.9480.11B - Matt white
- 07.9480.ANB - Black

Certificates

IP 20