



Anthony Downlight Optic Medium

■ 03.6417.14B - Black

High-performance embedded light fixture for LED light source. Remote 220-240V power supply not included.

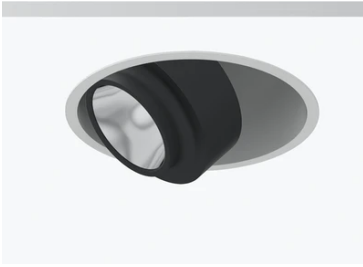


Main specifications

| | | | |
|------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 827 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 10.3W | Environment | Indoor dry location |
| CCT (K) | 2700K | | |
| CRI | 90 | | |

Optical

| | |
|-------------------------------|-----------|
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Medium |
| Beam angle (°) | 22 |
| Beam angle C90-270 (°) | 22 |

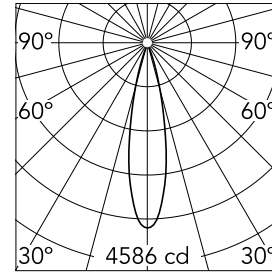

| | | | |
|--------------------|--------------|-------------|--|
| Beam Angle: | 22° | | |
| h(m) | E(lx) | D(m) | |
| 1 | 4586 | 0.40 | |
| 2 | 1147 | 0.79 | |
| 3 | 510 | 1.19 | |
| 4 | 287 | 1.58 | |
| 5 | 183 | 1.98 | |

Luminous flux luminaire
827 lm

Electrical

| | | | |
|-----------------------|---|-------------------------|---------|
| Frequency (Hz) | 50/60 | Emergency | Without |
| Voltage (V) | 11.40 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote excluded | | |
| Driver type | Non Dimmable, Dimmable DALI 2, Dimmable 0-10V, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming | | |

Physical

| | | | |
|----------------------------|------------|---------------------|-----|
| Color | Black | Rotation (°) | 360 |
| Orientation | Adjustable | | |
| Recessed depth (mm) | 90 | | |
| Weight (kg) | 1.07 | | |
| Tilt (°) | 40 | | |

Note

Standard trim cove in white for all finishes; black finish available under request. To obtain flood optics (35°) order Anthony Downlight Medium + flood lens.



Anthony Downlight Optic Medium



Continuous current power supply,
Mains dimming, leading & trailing edge
220/240V – 50/60Hz, 300mA-14W /
350mA-17W / 400mA-19W /
450/500/600/650/700/750/800/900mA –
20W
60.9467

Elliptical lens
08.8418.68A

Continuous current power supply of
25-50W, 110/240V – 50/60Hz with power
current selected through adjustable
350mA – 25W /500mA – 35W/ 700mA –
50W /750mA – 54W /900/ 1050 mA –
60W switch. Dali 2, 0/1-10V or push
dimming
60.8530



Flood lens
08.0050.00

Continuous current supply source 240V
– 50/60Hz with dimmable DALI 2, push
dimming. 300mA-16W / 350mA-18W /
400mA-21W / 500mA-27W / 600mA-32W
/ 650mA-35W
700/750/800/900/950/1000/1050mA-38W
60.9186

Continuous current power supply,
dimmable Casambi 220/240V-50/60Hz,
300mA-16W / 350mA-18,5W / 400mA-
21,5W / 450mA-24W / 500mA-27W /
600mA-32W / 650mA-35W / 700mA-36W
/750/800/900/1000/1050mA – 38W
60.9207



Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming
60.9188

Non dimmable continuous current power supply of 110/240V 32W, with power current selected through adjustable 350 mA-17W /500 mA-24W /700 mA-32W /900 mA – 32W switch
60.9233

Honeycomb
08.8419.14A