




Compass Box Recessed Small 2L

■ 03.2682.14A - Black

No Trim recessed luminaire with LED light source. Power supply not included. Requires one power supply for each optic body.

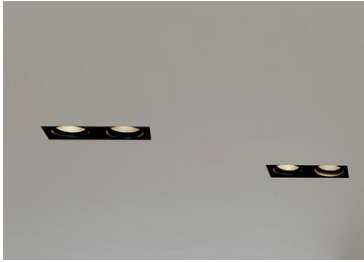

* Accessible ceiling: modular/open
** Inaccessible ceiling




Main specifications

Number of heads	2	Net lumen (lm)	739
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	9.2W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	59
Beam angle C90-270 (°)	60

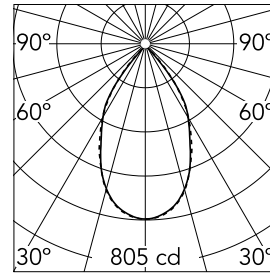

Beam Angle:	59°		
h(m)	E(lx)	D(m)	
1	805	1.14	
2	201	2.28	
3	89	3.42	
4	50	4.56	
5	32	5.70	

Luminous flux luminaire
739 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming Without		
Emergency	Without		

Physical

Color	Black
Orientation	Adjustable
Recessed depth (mm)	205
Weight (kg)	1.10
Rotation (°)	20

Note

Pre-installation frame must be ordered separately

Compass Box Recessed Small 2L



Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2
60.9222

Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.
60.8847

Screening cylinder
08.8238.14



Pre-installation frame
08.8192.00

Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207

Continuous current power supply, 1-10V, regulable Mains, leading & trailing edge 220/240V – 50/60Hz, 500mA – 10W
60.9411



Honeycomb
08.8196.14



Continuous current power supply of
13-20W, 110/240V – 50/60Hz with power
current selected through adjustable
300 mA – 15W / 350 mA – 18W /
400/450/500/550/600/
650/700/750/800/850/900 mA – 15W.
switch. 0/1-10V or push dimming
60.9188



Non dimmable continuous current
power supply of 220/240V – 50/60Hz
with power current selected through
adjustable with switch 200 mA – 8,5W /
300 mA – 13W / 350 mA – 15W / 400 mA
– 17,5W / 450 mA – 19,5W / 500 mA –
22W
60.9160