


Find Me 1 Mono Point (Trim/No Trim)

09.3755.06A - Chrome

Recessed adjustable luminaire for indoor application. Remote power supply 500 mA not included.

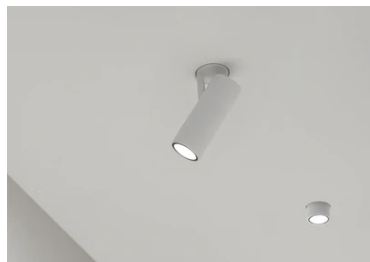


Main specifications

Number of heads	1	Net lumen (lm)	350
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	6W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		



Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	18
Beam angle C90-270 (°)	18



Beam Angle: 18°

h(m)	E(lx)	D(m)
1	3036	0.31
2	759	0.62
3	337	0.93
4	190	1.23
5	121	1.54

Luminous flux luminaire
350 lm (EXTREME CUT OFF)

Electrical


Voltage (V)	12	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable 0-10V, Dimmable Casambi, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		
Emergency	Without		

Physical

Color	Chrome	Rotation (°)	360
Orientation	Adjustable	Spot diameter (mm)	35
Recessed depth (mm)	137		
Weight (kg)	0.23		
Tilt (°)	70		

Note

Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place.



Find Me 1 Mono Point (Trim/No Trim)



Continuous current power supply, 1-10V, regulable Mains, leading & trailing edge 220/240V – 50/60Hz, 500mA – 10W
60.9411



Continuous current power supply of 6W, 100V / 14W, 240V – 50/60Hz with 500 mA supply voltage
60.8880



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W
60.9160



Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207



Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming
60.9188



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.
60.8847



Continuous current power supply of
12-20W, 110/240V – 50/60Hz with power
current selected through adjustable
350mA – 17W / 400mA – 19W / 450 / 550
/ 600 / 700mA – 20W regulable Dali 1 y
Dali 2
60.9222