



## Johnny 80 Semi-Recessed 1L Square

03.0762.40 - White

Semi-recessed luminaire with LED light source. Power supply not included.

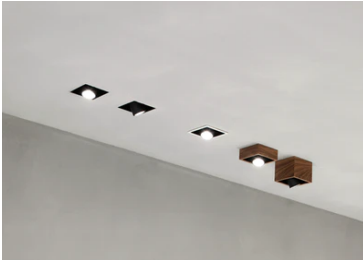


### Main specifications

|                        |       |                       |                  |
|------------------------|-------|-----------------------|------------------|
| <b>Number of heads</b> | 1     | <b>Net lumen (lm)</b> | 373              |
| <b>Lamp category</b>   | LED   | <b>Mountings</b>      | Ceiling recessed |
| <b>Power (W)</b>       | 6.2W  | <b>Environment</b>    | Indoor           |
| <b>CCT (K)</b>         | 3000K |                       |                  |
| <b>CRI</b>             | 90    |                       |                  |

### Optical

|                               |           |
|-------------------------------|-----------|
| <b>Lighting type</b>          | Direct    |
| <b>LED type</b>               | Power LED |
| <b>Light distribution</b>     | Symmetric |
| <b>Optical type</b>           | Medium    |
| <b>Beam angle (°)</b>         | 21        |
| <b>Beam angle C90-270 (°)</b> | 21        |

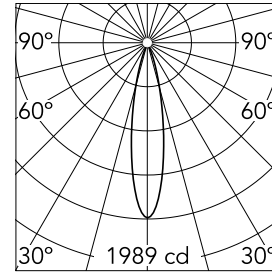

|                    |              |             |  |
|--------------------|--------------|-------------|--|
| <b>Beam Angle:</b> | 21°          |             |  |
| <b>h(m)</b>        | <b>E(lx)</b> | <b>D(m)</b> |  |
| 1                  | 1989         | 0.37        |  |
| 2                  | 497          | 0.74        |  |
| 3                  | 221          | 1.12        |  |
| 4                  | 124          | 1.49        |  |
| 5                  | 80           | 1.86        |  |

Luminous flux luminaire  
373 lm (EXTREME CUT OFF)

### Electrical

|                       |  |                         |         |
|-----------------------|--|-------------------------|---------|
| <b>Frequency (Hz)</b> | 50/60  | <b>Emergency</b>        | Without |
| <b>Voltage (V)</b>    | 12.00  | <b>Insulation class</b> | III     |
| <b>Dimmable</b>       | Yes  |                         |         |
| <b>Driver</b>         | Remote   |                         |         |
| <b>Driver type</b>    | Electronic,<br>Electronic dimmable,<br>Electronic dimmable 1-10V, Electronic dimmable DALI |                         |         |

### Physical

|                            |            |
|----------------------------|------------|
| <b>Color</b>               | White      |
| <b>Orientation</b>         | Adjustable |
| <b>Recessed depth (mm)</b> | 121        |
| <b>Weight (kg)</b>         | 0.50       |
| <b>Tilt (°)</b>            | 20         |

### Note

Accessories included (honeycomb and screening crosspiece).



## Johnny 80 Semi-Recessed 1L Square



---

Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W  
60.9160



---

Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W  
60.9207



---

Continuous current power supply, 1-10V, regulable Mains, leading & trailing edge 220/240V – 50/60Hz, 500mA – 10W  
60.9411



---

Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.  
60.8847



---

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming  
60.9188



---

Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2  
60.9222