
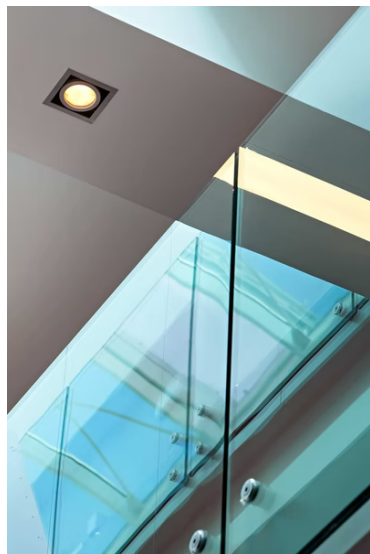


Battery Trim Small 1L■ **04.6471.14B - Matt Black**


Recessed luminaire with LED light source. Power supply not included.

**Main specifications**

Number of heads	1	Net lumen (lm)	1827
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	16.5W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

Optical

LED type	LED array
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	44
Beam angle C90-270 (°)	44



Beam Angle: 44°


h(m)	E(lx)	D(m)
1	3478	0.80
2	870	1.61
3	386	2.41
4	217	3.21
5	139	4.01

Luminous flux luminaire
1827 lm (EXTREME CUT OFF)**Electrical**

Frequency (Hz)	50/60	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming Without		

Emergency**Physical**

Color	Matt Black
Orientation	Adjustable
Recessed depth (mm)	149
Weight (kg)	0.76
Rotation (°)	40



Battery Trim Small 1L



BLUE FILTER
08.8503.64.OD

NEODIMIUM
08.8503.ND

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming 60.9188



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W /400 mA – 17W /450 mA – 19W /500/550/600/700 mA – 20W, Dali 1 switch. 60.8847

HOT LIGHT
08.8503.69

AMBER FILTER
08.8503.66.OD



RED FILTER
08.8503.67.OD

Continuous current power supply of
12-20W, 110/240V – 50/60Hz with power
current selected through adjustable
350mA – 17W / 400mA – 19W / 450 / 550
/ 600 / 700mA – 20W regulable Dali 1 y
Dali 2
60.9222

DAYLIGHT
08.8503.DL



Non dimmable continuous current
power supply of 220/240V – 50/60Hz
with power current selected through
adjustable with switch 200 mA – 8,5W /
300 mA – 13W / 350 mA – 15W / 400 mA
– 17,5W / 450 mA – 19,5W / 500 mA –
22W
60.9160

SKY BLUE FILTER
08.8503.65.OD

Honeycomb
08.8495.14



Mains dimming, leading & trailing edge COLD LIGHT
220/240V – 50/60Hz, 300mA-14W / 08.8503.CL
350mA-17W / 400mA-19W /
450/500/600/650/700/750/800/900mA –
20W
60.9467

dimmable Casambi 220/240V-50/60Hz,
300mA-16W / 350mA-18,5W / 400mA-
21,5W / 450mA-24W / 500mA-27W /
600mA-32W / 650mA-35W / 700mA-36W
/750/800/900/1000/1050mA – 38W
60.9207