




## Battery Trim Small 3L

### ■ 04.6481.14B - Matt Black

Recessed luminaire with LED light source. Power supply not included. Requires one power supply for each optic body.

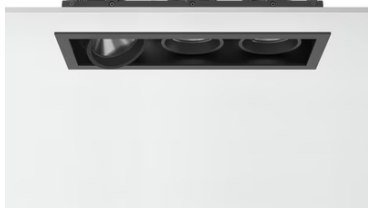


### Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 3     | Net lumen (lm) | 1827                |
| Lamp category   | LED   | Mountings      | Ceiling recessed    |
| Power (W)       | 16.5W | Environment    | Indoor dry location |
| CCT (K)         | 3000K |                |                     |
| CRI             | 80    |                |                     |

### Optical

|                        |            |
|------------------------|------------|
| LED type               | LED array  |
| Light distribution     | Symmetric  |
| Optical type           | Wide flood |
| Beam angle (°)         | 44         |
| Beam angle C90-270 (°) | 44         |



Beam Angle: 44°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 3478  | 0.80 |
| 2    | 870   | 1.61 |
| 3    | 386   | 2.41 |
| 4    | 217   | 3.21 |
| 5    | 139   | 4.01 |

Luminous flux luminaire  
1827 lm (EXTREME CUT OFF)

### Electrical

|                |                                                                                                     |                  |     |
|----------------|-----------------------------------------------------------------------------------------------------|------------------|-----|
| Frequency (Hz) | 50/60                                                                                               | Insulation class | III |
| Dimmable       | Yes                                                                                                 |                  |     |
| Driver         | Remote excluded                                                                                     |                  |     |
| Driver type    | Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming |                  |     |
| Emergency      | Without                                                                                             |                  |     |

### Physical

|                     |            |
|---------------------|------------|
| Color               | Matt Black |
| Orientation         | Adjustable |
| Recessed depth (mm) | 149        |
| Weight (kg)         | 1.61       |
| Rotation (°)        | 40         |

Battery Trim Small 3L



RED FILTER  
08.8503.67.OD

Continuous current power supply,  
Mains dimming, leading & trailing edge  
220/240V – 50/60Hz, 300mA-14W /  
350mA-17W / 400mA-19W /  
450/500/600/650/700/750/800/900mA –  
20W  
60.9467

AMBER FILTER  
08.8503.66.OD



NEODIMIUM  
08.8503.ND

BLUE FILTER  
08.8503.64.OD

Non dimmable continuous current  
power supply of 220/240V – 50/60Hz  
with power current selected through  
adjustable with switch 200 mA – 8,5W /  
300 mA – 13W / 350 mA – 15W / 400 mA  
– 17,5W / 450 mA – 19,5W / 500 mA –  
22W  
60.9160




---

COLD LIGHT  
08.8503.CL

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming 60.9188

SKY BLUE FILTER  
08.8503.65.OD




---

Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W 60.9207

DAYLIGHT  
08.8503.DL

Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2 60.9222



Honeycomb  
08.8495.14

HOT LIGHT  
08.8503.69

10-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
250 mA – 10W / 350 mA – 15W /400 mA  
– 17W /450 mA – 19W /500/550/600/700  
mA – 20W, Dali 1 switch.  
60.8847