

Decofix Round 1L

09.3110.30A - White


Recessed luminaire with LED light source. Power supply not included.

Main specifications

Number of heads	1	Net lumen (lm)	396
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	9.2W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Beam angle (°)	35
Beam angle C90-270 (°)	35

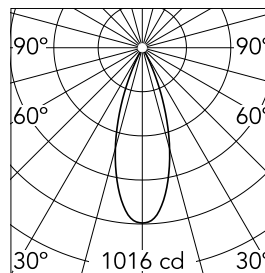

Beam Angle: 35°

h(m)	E(lx)	D(m)
1	1016	0.63
2	254	1.26
3	113	1.88
4	63	2.51
5	41	3.14

Luminous flux luminaire
396 lm

Electrical

Frequency (Hz)	50/60	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming Without		




Emergency

Physical

Color	White
Orientation	Fixed
Recessed depth (mm)	126
Weight (kg)	0.45

Note

All versions have interchangeable screening cylinders in 3 colours: black, gold or silver, incorporated into the light fixture.

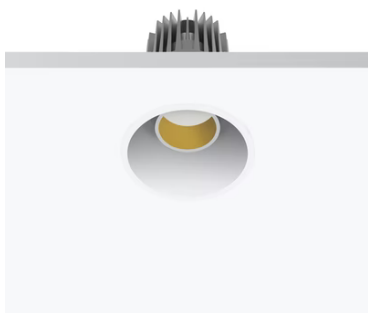

Decofix Round 1L



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W
60.9160



Continuous current power supply, 1-10V, regulable Mains, leading & trailing edge 220/240V – 50/60Hz, 500mA – 10W
60.9411



Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming
60.9188



Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.
60.8847



Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2
60.9222