




03.2001.CU.DA - Copper

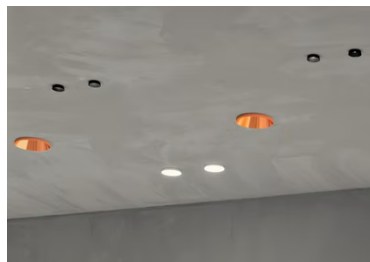

|                 |       |
|-----------------|-------|
| Number of heads | 1     |
| Lamp category   | LED   |
| Power (W)       | 6W    |
| CCT (K)         | 2700K |
| CRI             | 90    |

|                       |                     |
|-----------------------|---------------------|
| <b>Net lumen (lm)</b> | 335                 |
| <b>Mountings</b>      | Ceiling recessed    |
| <b>Environment</b>    | Indoor dry location |

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Spot      |
| Beam angle (°)         | 24        |
| Beam angle C90-270 (°) | 24        |



Luminous flux lumineaire  
335 lm

Beam Angle: 24°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 1556  | 0.43 |
| 2    | 389   | 0.85 |
| 3    | 173   | 1.28 |
| 4    | 97    | 1.71 |
| 5    | 62    | 2.14 |

|                       |                                                                                                                           |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>Frequency (Hz)</b> | 50/60                                                                                                                     |
| <b>Voltage (V)</b>    | 220.00                                                                                                                    |
| <b>Dimmable</b>       | Yes                                                                                                                       |
| <b>Driver</b>         | Remote<br>excluded                                                                                                        |
| <b>Driver type</b>    | Non Dimmable,<br>Dimmable DALI<br>2, Dimmable<br>Casambi,<br>Dimmable 1-<br>10V, Dimmable<br>DALI 1, Mains<br>Cut Dimming |

|                  |         |
|------------------|---------|
| Emergency        | Without |
| Insulation class | II      |

|                     |        |
|---------------------|--------|
| Color               | Copper |
| Orientation         | Fixed  |
| Recessed depth (mm) | 67     |
| Weight (kg)         | 0.13   |

Accessories included (honeycomb and cross screening cylinder). Remote power supply to be installed in an accessible place.