




03.2006.14.DA - Black

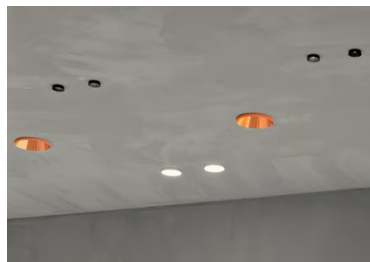

Number of heads	1
Lamp category	LED
Power (W)	6W
CCT (K)	3000K
CRI	90

Net lumen (lm)	362
Mountings	Ceiling recessed
Environment	Indoor dry location

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	24
Beam angle C90-270 (°)	24



Luminous flux lumineire
362 lm

Beam Angle: 24°

h(m)	E(lx)	D(m)
1	1737	0.42
2	434	0.84
3	193	1.26
4	109	1.68
5	69	2.10

Frequency (Hz)	50/60
Voltage (V)	220.00
Dimmable	Yes
Driver	Remote excluded
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1- 10V, Dimmable DALI 1, Mains Cut Dimming

Emergency	Without
Insulation class	II

Color	Black
Orientation	Fixed
Recessed depth (mm)	67
Weight (kg)	0.13

Accessories included (honeycomb and cross screening cylinder). Remote power supply to be installed in an accessible place.