




03.2003.CU.DA - Copper

Recessed luminaire with LED light source. Remote 220/240V power supply included.

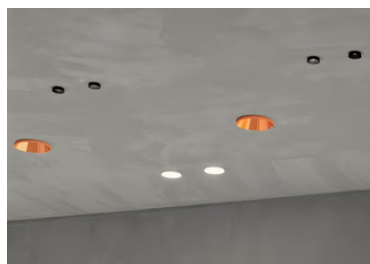

Number of heads	1	Net lumen (lm)	640
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13.5W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	34
Beam angle C90-270 (°)	34



Luminous flux luminaire
640 lm

Beam Angle:	34°	
h(m)	E(lx)	D(m)
1	1509	0.60
2	377	1.21
3	168	1.81
4	94	2.42
5	60	3.02

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		

Color	Copper
Orientation	Fixed
Recessed depth (mm)	155
Weight (kg)	0.53

Pre-installation frame must be ordered separately

Bon Jour Ø 90 Dali



Honeycomb and cross screening
cylinder
08.8976.14

Pre-installation frame
08.8974.00