

Box

■ **07.9000.72.E3 - Grey**


Recessed signalling lamp for indoor or outdoor use. Electronic control gear integrated.

Main specifications

Number of heads	1	Environment	Indoor dry location
Lamp category	Fluorescent		
Power (W)	18W		
Net lumen (lm)	294		
Mountings	Wall recessed		

Optical

Lighting type	Indirect, Direct
Lamp type	TC-DEL
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	65
Beam angle C90-270 (°)	79

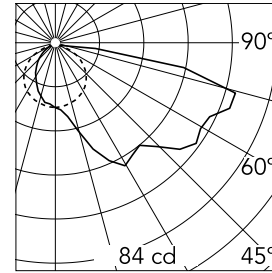

Beam Angle: 79°

h(m)	E(lx)	D(m)
1	84	6.73
2	21	13.47
3	9	20.20
4	5	26.93
5	3	33.66

Luminous flux luminaire
1200 lm


Electrical

Frequency (Hz)	50
Lamp holder	G24q
Driver	Integrated
Emergency	Without
Insulation class	II

Physical

Color	Grey
Orientation	Fixed
Recessed depth (mm)	52
Weight (kg)	1.50

Box

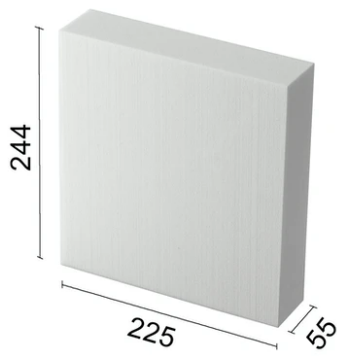

High density polystyrene
(225x55x244mm)
80.1318

Junction box
08.8012.00

Flush wall Installation
08.8256.00