



### Box

#### 07.9007.01B - Matt White


Semi-recessed signalling lamp for indoor or outdoor use. 220-240V, 50-60Hz non-regulable power supply included.

### Main specifications

Number of heads	1	Net lumen (lm)	263
Lamp category	LED	Mountings	Wall recessed
Power (W)	5W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

### Optical


Lighting type	Indirect, Direct
LED type	Power LED
Light distribution	Asymmetric
Optical type	Wide flood
Beam angle (°)	55
Beam angle C90-270 (°)	84

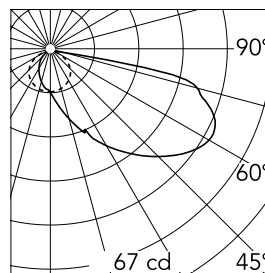

Beam Angle: 84°

h(m)	E(lx)	D(m)
1	67	5.27
2	17	10.54
3	7	15.81
4	4	21.07
5	3	26.34

Luminous flux luminaire  
263 lm




### Electrical

Frequency (Hz)	50	Insulation class	II
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		
Emergency	Without		

### Physical

Color	Matt White
Orientation	Fixed
Recessed depth (mm)	52
Weight (kg)	1.65




Box



Flush wall Installation  
08.8256.00



Junction box  
08.8012.00

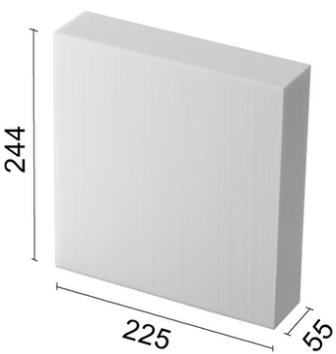

High density polystyrene  
(225x55x244mm)  
80.1318