

Box

■ **07.9007.18B - Dark Brown**


Semi-recessed signalling lamp for indoor or outdoor use. 220-240V, 50-60Hz non-regulable power supply included.

Main specifications

Number of heads	1	Net lumen (lm)	263
Lamp category	LED	Mountings	Wall recessed
Power (W)	5W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

Optical

Lighting type	Indirect, Direct
LED type	Power LED
Light distribution	Asymmetric
Optical type	Wide flood
Beam angle (°)	55
Beam angle C90-270 (°)	84

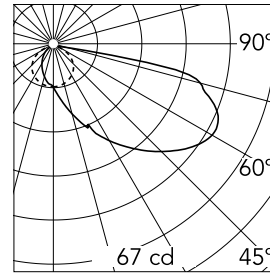

Beam Angle: 84°

h(m)	E(lx)	D(m)
1	67	5.27
2	17	10.54
3	7	15.81
4	4	21.07
5	3	26.34

Luminous flux luminaire
263 lm


Electrical

Frequency (Hz)	50	Insulation class	II
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		
Emergency	Without		

Physical

Color	Dark Brown
Orientation	Fixed
Recessed depth (mm)	52
Weight (kg)	1.65

Box

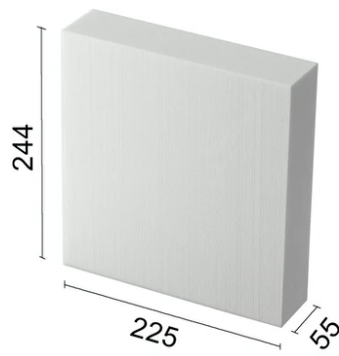

Flush wall Installation
08.8256.00

High density polystyrene
(225x55x244mm)
80.1318

Junction box
08.8012.00