



## Easy Kap Ø80 Adjustable Optic Spot

03.4153.B1 - White

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

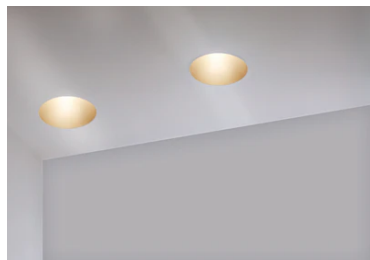


## Main specifications

Number of heads	1	Net lumen (lm)	704
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	9.2W	Environment	Indoor
CCT (K)	2700K		
CRI	90		

## Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	18
Beam angle C90-270 (°)	19
Efficiency (lm/W)	76

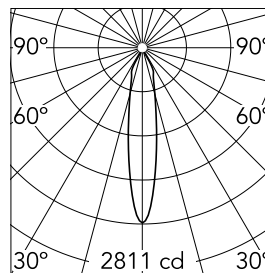

Beam Angle: 18°

h(m)	E(lx)	D(m)
1	2811	0.33
2	703	0.66
3	312	0.99
4	176	1.33
5	112	1.66

Luminous flux luminaire  
704 lm (EXTREME CUT OFF)

## Electrical


Voltage (V)	17.80	Emergency	Without
Current (mA)	500	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI		

## Physical

Color	White	Tilt (°)	20
Orientation	Adjustable	Rotation (°)	360
Trim	yes	Spot diameter (mm)	80
Recessed depth (mm)	91		
Weight (kg)	0.24		

## Note

Diffusing lens included



## Easy Kap Ø80 Adjustable Optic Spot



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200mA – 8,5W / 250mA – 11W / 300mA – 13W / 350mA – 15W / 400mA – 17,5W / 450mA 19,5W / 500mA – 22W.  
60.9160



Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming  
60.9188



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.  
60.8847



Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2  
60.9222



Continuous current power supply, Mains dimming , 220/240V – 50/60Hz, 10W – 500mA.  
60.9411



Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207