




Easy Kap Ø80 Plus Adjustable Optic Medium

05.7404.CU - Copper

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary. Diffusing lens included.

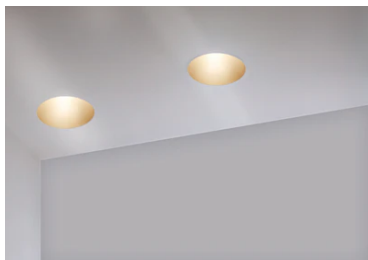


Main specifications

| | | | |
|-----------------|-------|----------------|------------------|
| Number of heads | 1 | Net lumen (lm) | 895 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 13.4W | Environment | Indoor |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical

| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Medium |
| Beam angle (°) | 26 |
| Beam angle C90-270 (°) | 26 |
| Efficiency (lm/W) | 66 |

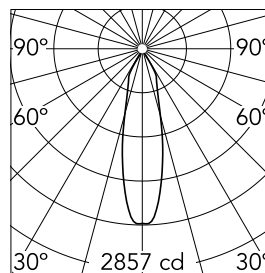

Beam Angle: 26°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 2857 | 0.47 |
| 2 | 714 | 0.93 |
| 3 | 317 | 1.40 |
| 4 | 179 | 1.86 |
| 5 | 114 | 2.33 |

Luminous flux luminaire
895 lm (EXTREME CUT OFF)

Electrical

| | | | |
|--------------|--|------------------|---------|
| Voltage (V) | 17,8 | Emergency | Without |
| Current (mA) | 700 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote | | |
| Driver type | Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI | | |

Physical

| | | | |
|---------------------|------------|--------------------|-----|
| Color | Copper | Tilt (°) | 20 |
| Orientation | Adjustable | Rotation (°) | 360 |
| Trim | yes | Spot diameter (mm) | 80 |
| Recessed depth (mm) | 150 | | |
| Weight (kg) | 0,241 | | |

Easy Kap Ø80 Plus Adjustable Optic Medium



Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch.
60.9592



Continuous current power supply of 13-20W, 110*/240V – 50/60Hz with power current selected through adjustable switch. 1-10V or push dimming.
60.9188



Constant Current Power Supply for LED. Dimmable DALI. 10-20W
60.8847



Continuous current power supply of 12-20W, 110*/240V – 50/60Hz with power current selected through adjustable. Regurable DALI 1 y DALI 2
60.9222



Continuous current power supply, Mains dimming 220/240V – 50/60Hz, 12-20W
60.9467



Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 35W – 650mA / 36W – 700 mA.
60.9207