




Johnny 80 Semi-Recessed 2L Square

■ 03.0730.CE - Concrete

Semi-recessed luminaire with LED light source. Power supply not included. Requires one power supply for each optic body.

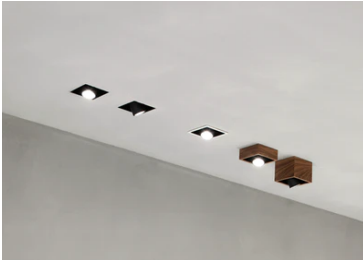


Main specifications

| | | | |
|------------------------|-------|-----------------------|------------------|
| Number of heads | 2 | Net lumen (lm) | 798.62 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 6.2W | Environment | Indoor |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical

| | |
|---------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Spot |
| Beam angle (°) | 14 |

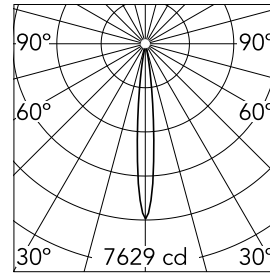

| | | | |
|--------------------|--------------|-------------|--|
| Beam Angle: | 11° | | |
| h(m) | E(lx) | D(m) | |
| 1 | 7629 | 0.19 | |
| 2 | 1907 | 0.38 | |
| 3 | 848 | 0.57 | |
| 4 | 477 | 0.76 | |
| 5 | 305 | 0.95 | |

Luminous flux luminaire
399 lm (EXTREME CUT OFF)

Electrical

| | | | |
|-----------------------|---|-------------------------|---------|
| Frequency (Hz) | 50/60 | Emergency | Without |
| Voltage (V) | 12.00 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote | | |
| Driver type | Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI | | |

Physical

| | |
|----------------------------|------------|
| Color | Concrete |
| Orientation | Adjustable |
| Recessed depth (mm) | 152 |
| Weight (kg) | 0.65 |
| Tilt (°) | 20 |

Note

Accessories included (honeycomb and screening crosspiece).

Johnny 80 Semi-Recessed 2L Square



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W
60.9160

Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207

Continuous current power supply, 1-10V, regulable Mains, leading & trailing edge 220/240V – 50/60Hz, 500mA – 10W
60.9411



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.
60.8847

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming
60.9188

Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2
60.9222