





 03.0733.TKA - Teak/Black

A wooden cabinet with two drawers, viewed from below, showing the underside of the drawers. The cabinet is made of light-colored wood and has a simple, modern design. The drawers are pulled out, revealing the interior of the cabinet. The background is a plain, light-colored wall.

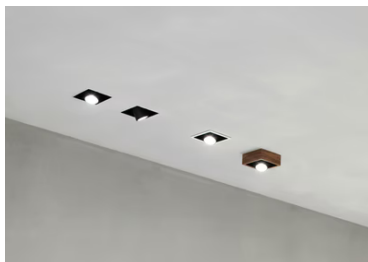

Number of heads	2	Net lumen (lm)	359
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	6.2W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	21
Beam angle C90-270 (°)	21



Beam Angle:	21°	
<u>h(m)</u>	<u>E(lx)</u>	<u>D(m)</u>
1	1919	0.37
2	480	0.74
3	213	1.12
4	120	1.49
5	77	1.86

Luminous flux luminaire
359 lm (EXTREME CUT OFF)

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	12	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		

Color	Teak/Black
Orientation	Adjustable
Recessed depth (mm)	152
Weight (kg)	0.65
Tilt (°)	20

Accessories included (honeycomb and screening crosspiece).

Johnny 80 Semi-Recessed 2L Square



Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W
60.9160



Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming
60.9188



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.
60.8847



Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2
60.9222



Continuous current power supply, 1-10V, regulable Mains, leading & trailing edge 220/240V – 50/60Hz, 500mA – 10W
60.9411