




Kap 80 Plus Square Wall-Washer

Update

05.7423.CU - Copper

Recessed luminaire with LED light source. Power supply not included Elliptical lens included.

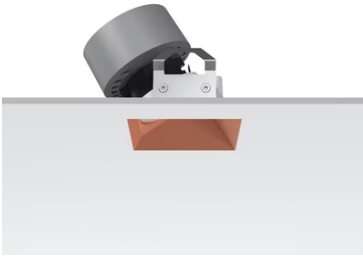


Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	932
Power (W)	13W	Mountings	Ceiling recessed
System power (W)	13.4	Environment	Indoor dry location
CCT (K)	2700K		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Asymmetric
Optical type	Wall Washer
	Down
Beam angle (°)	28
Beam angle C90-270 (°)	27
UGRL	21
Efficiency (lm/W)	69

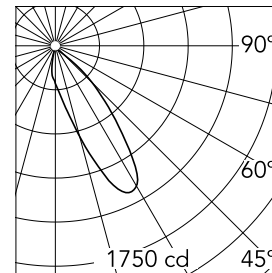

Beam Angle: 28°

h(m)	E(lx)	D(m)
1	1750	0.64
2	437	1.29
3	194	1.93
4	109	2.57
5	70	3.21


Luminous flux luminaire
932 lm (EXTREME CUT OFF)

Electrical

Voltage (V)	18	Emergency	Without
Current (mA)	700	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable 0-10V, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		

Physical

Color	Copper
Orientation	Fixed
Recessed depth (mm)	150
Weight (kg)	0.24
Lifespan (L70 B10)	L80B50



Kap 80 Plus Square Wall-Washer



Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable
60.9592



Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable switch. 0/1-10V or push dimming
60.9188



Continuous current power supply, Mains dimming, leading & trailing edge 220/240V – 50/60Hz, 300mA-14W / 350mA-17W / 400mA-19W / 450/500/600/650/700/750/800/900mA – 20W
60.9467



Installation frame No Trim
08.9103.00



Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable switch. 0/1-10V or push dimming
60.8847



Continuous current power supply of
12-20W, 110/240V – 50/60Hz with power
current selected through adjustable
350mA – 17W / 400mA – 19W / 450 / 550
/ 600 / 700mA – 20W regulable Dali 1 y
Dali 2
60.9222