

### Light Shadow Pro Ø60 Fixed Optic Wide Flood

03.9913.06 - Chrome

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.




#### Main specifications

Number of heads	1	Net lumen (lm)	1343
Lamp category	LED	Mountings	Recessed
Power (W)	15W	Environment	Indoor
CCT (K)	4000K		
CRI	90		

#### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	51
Beam angle C90-270 (°)	51



Beam Angle: 51°

h(m)	E(lx)	D(m)
1	1803	0.95
2	451	1.89
3	200	2.84
4	113	3.79
5	72	4.74




Luminous flux luminaire  
1343 lm

#### Electrical

Current (mA)	400	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable 1- 10V, Electronic dimmable DALI		
Emergency	Without		

#### Physical

Color	Chrome
Orientation	Fixed
Recessed depth (mm)	91
Weight (kg)	0.22
Spot diameter (mm)	60

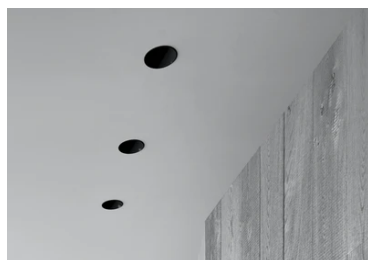

Light Shadow Pro Ø60 Fixed Optic Wide Flood



Installation Frame Trim  
08.0160.40



Installation Frame Trim  
08.0160.14



Installation Frame No Trim  
08.0162.00



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200mA – 8,5W / 250mA – 11W / 300mA – 13W / 350mA – 15W / 400mA – 17,5W / 450mA 19,5W / 500mA – 22W.  
60.9160



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 36W – 700 mA  
60.9439



Continuous current supply source of 240V – 50/60Hz with dimmable DALI 2  
60.9186



Continuous current power supply of 12-24V 220/240V – 50/60Hz  
60.9160



Continuous current power supply of 12-24V 220/240V – 50/60Hz  
60.9439



Continuous current power supply of 12-24V 220/240V – 50/60Hz  
60.9186

switch  
60.9162



adjustable switch. 1-10V or push  
dimming.  
60.9188



adjustable. Regulable DALI 1 y DALI 2  
60.9222

---

Continuous current power supply,  
Mains dimming 220/240V – 50/60Hz, 12-  
20W  
60.9467

---

Continuous current power supply,  
dimmable Casambi, 220/240V –  
50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207