

Light Shadow Pro Ø90 Adjustable Optic Medium

03.9942.06 - Chrome


LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Main specifications

Number of heads	1	Net lumen (lm)	1528
Lamp category	LED	Mountings	Recessed
Power (W)	18W	Environment	Indoor
CCT (K)	4000K		
CRI	90		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	24
Beam angle C90-270 (°)	24



Beam Angle: 24°

	h(m)	E(lx)	D(m)
--	------	-------	------

1	10467	0.42
---	-------	------

2	2617	0.83
---	------	------

3	1163	1.25
---	------	------

4	654	1.67
---	-----	------

5	419	2.09
---	-----	------




Luminous flux luminaire
1528 lm

Electrical

Current (mA)	500	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable 1- 10V, Electronic dimmable DALI		
Emergency	Without		

Physical

Color	Chrome	Rotation (°)	355
Orientation	Adjustable	Spot diameter (mm)	90
Recessed depth (mm)	111		
Weight (kg)	0.54		
Tilt (°)	35		

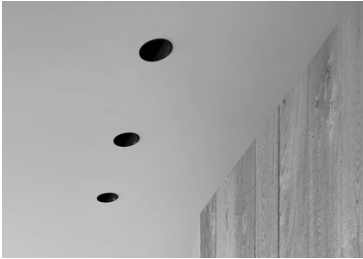


Light Shadow Pro Ø90 Adjustable Optic Medium



Installation Frame Trim
08.0165.40



Installation Frame Trim
08.0165.14

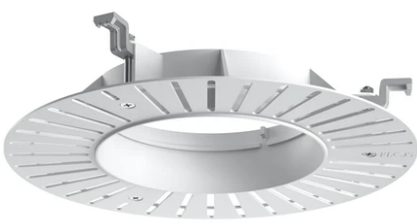

Installation Frame No Trim
08.0167.00



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200mA – 8,5W / 250mA – 11W / 300mA – 13W / 350mA – 15W / 400mA – 17,5W / 450mA 19,5W / 500mA – 22W.
60.9160



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 36W – 700 mA
60.9439



Continuous current supply source of 240V – 50/60Hz with dimmable DALI 2
60.9186



Continuous current power supply of 18-28W 220/240V – 50/60Hz
60.9160



Continuous current power supply of 18-28W 220/240V – 50/60Hz
60.9439



Continuous current power supply of 18-28W 220/240V – 50/60Hz
60.9186

switch
60.9162



adjustable switch. 1-10V or push
dimming.
60.9188



adjustable. Regulable DALI 1 y DALI 2
60.9222

Continuous current power supply,
Mains dimming 220/240V – 50/60Hz, 12-
20W
60.9467

Continuous current power supply,
dimmable Casambi, 220/240V –
50/60Hz, 35W – 650mA / 36W – 700 mA.
60.9207