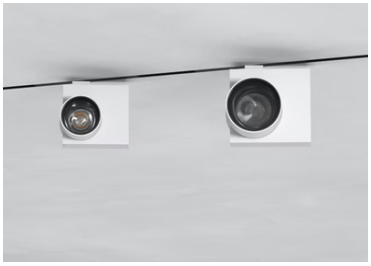



Camera 90 Potenciometer

New

09.8208.DR.PC - Anthracite

Spotlight to be installed on 3-phase track with LED light source. 220- 240V, 50-60Hz power supply integrated. To be used with The Tracking Power profiles.

Main specifications

Number of heads	1	**Net lumen (lm)**	2276
Lamp category	LED	**Mountings**	Track
Power (W)	32W	**Environment**	Indoor dry location
CCT (K)	3500K		
CRI	97		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	43
Beam angle C90-270 (°)	43
UGRL	4
Efficiency (lm/W)	71.13



Luminous flux luminaire
2276 lm

Beam Angle: 43°

h(m)	E(lx)	D(m)
1	5258	0.78
2	1315	1.56
3	584	2.34
4	329	3.12
5	210	3.90

Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	220-240	**Insulation class**	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Dimmer on board		

Physical

Color	Anthracite	**Spot diameter (mm)**	90
Orientation	Adjustable	**Length (mm)**	131
Weight (kg)	0.75		
Tilt (°)	90		
Rotation (°)	360		

Camera 90 Potenciometer

Honeycomb
08.0178.14