


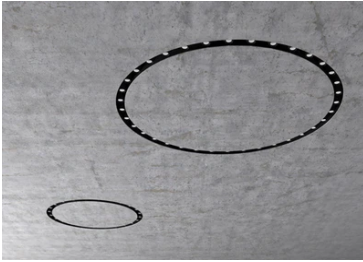


Circle of Light Soft Plate 300 mm

■ SA.1050.1 - Black

Lighting system, seamless ceiling mounted, for 12 individual LED lighting spots. Set of 12 spots, complete with junction box, power supply and cables, has to be ordered separately. The 1-10V version is dimmable from 10% to 100%.

Lighting system, seamless ceiling mounted, for 12 individual LED lighting spots. Set of 12 spots, complete with junction box, power supply and cables, has to be ordered separately. The 1-10V version is dimmable from 10% to 100%.

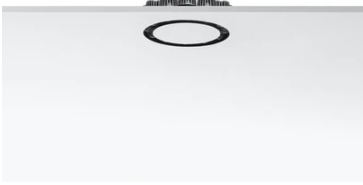


Main specifications

Mountings	Ceiling recessed
Environment	Indoor

Optical

Lighting type	Direct
Light distribution	Symmetric

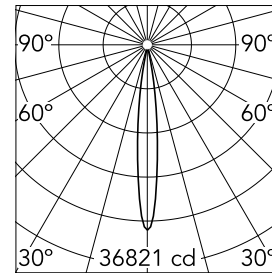

Beam Angle:	h(m)	E(lx)	D(m)
12°	1	36821	0.22
	2	9205	0.43
	3	4091	0.65
	4	2301	0.87
	5	1473	1.08

Luminous flux luminaire
2061 lm

Electrical

Driver	Remote
Emergency	Without
Insulation class	II

Physical

Color	Black
Recessed depth (mm)	150
Weight (kg)	7.90

Note

Accent Lighting and General Lighting: 1 unit must be ordered (accessories).

Circle of Light Soft Plate 300 mm



Accent Lighting. Set of 12 spots x 370
lm 3000K CRI 90
08.8572.14C

08.8572.14C1V
08.8572.14C1V

Accent Lighting. Set of 12 spots x 370
lm 3000K CRI 90. Dimmable DALI
08.8572.14CDA



General Lighting. Set of 12 Spots x 370
lm 3000K CRI 90
08.8573.14C

08.8573.14C1V
08.8573.14C1V

General Lighting. Set of 12 spots x 370
lm 3000K CRI 90. Dimmable DALI
08.8573.14CDA



Accent Lighting. Set of 12 spots x 325
lm 2700K CRI 90
08.8662.14C

08.8662.14C1V
08.8662.14C1V

Accent Lighting. Set of 12 spots x 325
lm 2700K CRI 90. Dimmable DALI
08.8662.14CDA



General Lighting. Set of 12 spots x 325
lm 2700K CRI 90
08.8663.14C

08.8663.14C1V
08.8663.14C1V

General Lighting. Set of 12 spots x 325
lm 2700K CRI 90. Dimmable DALI
08.8663.14CDA