

Compass Box Large 2L

■ 03.1061.TK - Teak



Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V – 12V, 50/60Hz. The intensity of the lighting may be adjusted via leading and trail edge modulation in halogen lamps.

Main specifications

Number of heads	1
Lamp category	Halogen
Power (W)	2 x 75W Max.
Mountings	Ceiling surface
Environment	Indoor dry location

Optical




Lamp type	QR-111
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	8

Electrical

Frequency (Hz)	50/60	Emergency	Without
Lamp holder	G53	Insulation class	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Electronic 12V		

Physical

Color	Teak
Orientation	Adjustable
Weight (kg)	2.90
Tilt (°)	20

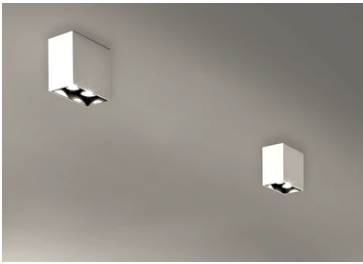

Compass Box Large 2L



Screening cylinder
08.8034.14



Honeycomb
08.8036.14