




Compass Box Recessed Small 1L

■ 03.2677.14A - Black

No Trim recessed luminaire with LED light source. Power supply not included.

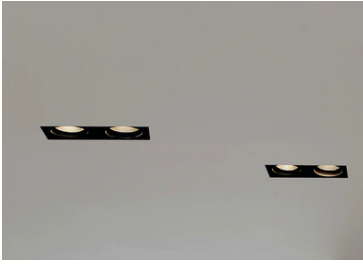

* Accessible ceiling: modular/open
** Inaccessible ceiling




Main specifications

| | | | |
|-----------------|-------|----------------|------------------|
| Number of heads | 1 | Net lumen (lm) | 739 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 9.2W | Environment | Indoor |
| CCT (K) | 3000K | | |
| CRI | 80 | | |

Optical

| | |
|------------------------|------------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Wide flood |
| Beam angle (°) | 59 |
| Beam angle C90-270 (°) | 60 |

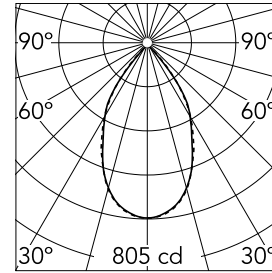

| | | | |
|-------------|------|-------|------|
| Beam Angle: | 59° | | |
| | h(m) | E(lx) | D(m) |
| 1 | 805 | 1.14 | |
| 2 | 201 | 2.28 | |
| 3 | 89 | 3.42 | |
| 4 | 50 | 4.56 | |
| 5 | 32 | 5.70 | |

Luminous flux luminaire
739 lm (EXTREME CUT OFF)

Electrical

| | | | |
|----------------|---|------------------|-----|
| Frequency (Hz) | 50/60 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote | | |
| Driver type | Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI | | |
| Emergency | Without | | |

Physical

| | |
|---------------------|------------|
| Color | Black |
| Orientation | Adjustable |
| Recessed depth (mm) | 205 |
| Weight (kg) | 1.10 |
| Rotation (°) | 20 |

Note

Pre-installation frame must be ordered separately

Compass Box Recessed Small 1L



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W
60.9160



Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207



Continuous current power supply, 1-10V, regulable Mains, leading & trailing edge 220/240V – 50/60Hz, 500mA – 10W
60.9411



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.
60.8847



Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming
60.9188



Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2
60.9222



Pre-installation frame
08.8191.00



Honeycomb
08.8196.14



Screening cylinder
08.8238.14