



## Compass Box Small 2L

■ 03.2601.WG - Wenge

Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V – 12V, 50/60Hz. The intensity of the lighting may be adjusted via leading and trail edge modulation.

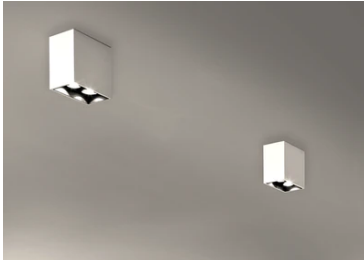

### Main specifications

|                 |                     |
|-----------------|---------------------|
| Number of heads | 1                   |
| Lamp category   | LED retrofit        |
| Mountings       | Ceiling surface     |
| Environment     | Indoor dry location |

### Optical


|                    |           |
|--------------------|-----------|
| Lamp type          | QR-CBC 51 |
| Light distribution | Symmetric |
| Optical type       | Spot      |
| Beam angle (°)     | 10        |

### Electrical

|                |                |                  |         |
|----------------|----------------|------------------|---------|
| Frequency (Hz) | 50/60          | Emergency        | Without |
| Lamp holder    | GX5.3          | Insulation class | I       |
| Dimmable       | Yes            |                  |         |
| Driver         | Integrated     |                  |         |
| Driver type    | Electronic 12V |                  |         |

### Physical

|             |            |
|-------------|------------|
| Color       | Wenge      |
| Orientation | Adjustable |
| Weight (kg) | 1.50       |
| Tilt (°)    | 20         |



## Compass Box Small 2L



---

Honeycomb  
08.8196.14



---

Screening cylinder  
08.8238.14