

## Compass Box Small 4L

### 03.2603.29 - Anodized Aluminium



Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V – 12V, 50/60Hz. The intensity of the lighting may be adjusted via leading and trail edge modulation.

#### Main specifications

Number of heads	1
Lamp category	LED retrofit
Mountings	Ceiling surface
Environment	Indoor dry location

#### Optical




Lamp type	QR-CBC 51
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10

#### Electrical

Frequency (Hz)	50/60	Emergency	Without
Lamp holder	GX5.3	Insulation class	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Electronic 12V		

#### Physical

Color	Anodized Aluminium
Orientation	Adjustable
Weight (kg)	2.80
Tilt (°)	20

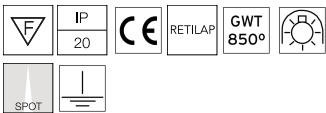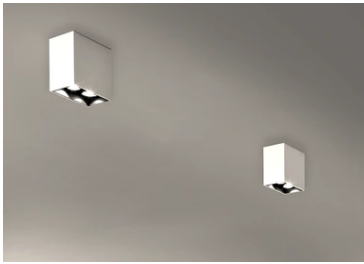

## Compass Box Small 4L



---

Honeycomb  
08.8196.14



---

Screening cylinder  
08.8238.14