

Compass Box Small 4L

■ 03.2640.14A - Matt black




Surface spotlight to be installed on ceiling/wall with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.

Surface spotlight to be installed on ceiling/wall with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.


Main specifications

Number of heads	4	Net lumen (lm)	2354.72
Lamp category	LED	Mountings	Ceiling surface
Power (W)	24.8W	Environment	Indoor
CCT (K)	3000K		
CRI	80		

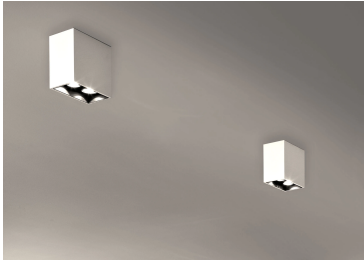


Optical

LED type	LED array
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	24

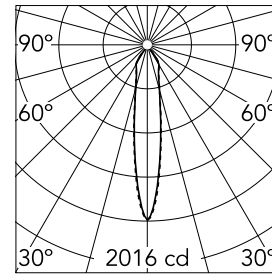

Beam Angle: 18°		
h(m)	E(lx)	D(m)
1	2016	0.31
2	504	0.62
3	224	0.93
4	126	1.23
5	81	1.54

Luminous flux luminaire
601 lm (EXTREME CUT OFF)



Electrical

Frequency (Hz)	50/60	Insulation class	I
Dimmable	No		
Driver	Integrated		
Driver type	Electronic		
Emergency	Without		

Certification / Marking



Physical

Color	Matt black
Orientation	Adjustable
Weight (kg)	3
Tilt (°)	20