



## Compass Box Small 4L Square

■ 03.2645.29A - Anodized Aluminium

Surface spotlight to be installed on ceiling/wall with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.

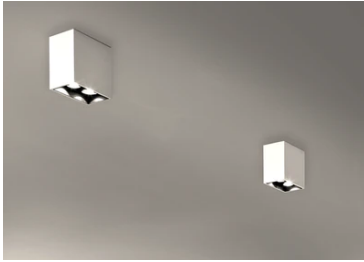


### Main specifications

<b>Number of heads</b>	4	<b>Net lumen (lm)</b>	601
<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling surface
<b>Power (W)</b>	6.2W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	80		

### Optical

<b>LED type</b>	LED array
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Spot
<b>Beam angle (°)</b>	18
<b>Beam angle C90-270 (°)</b>	18



Beam Angle: 18°

h(m)	E(lx)	D(m)
1	2016	0.31
2	504	0.62
3	224	0.93
4	126	1.23
5	81	1.54

Luminous flux luminaire  
601 lm (EXTREME CUT OFF)

### Electrical

<b>Frequency (Hz)</b>	50/60	<b>Insulation class</b>	I
<b>Dimmable</b>	No		
<b>Driver</b>	Integrated		
<b>Driver type</b>	Non Dimmable		
<b>Emergency</b>	Without		

### Physical

<b>Color</b>	Anodized Aluminium
<b>Orientation</b>	Adjustable
<b>Weight (kg)</b>	2.80
<b>Tilt (°)</b>	20

