



Easy Kap 80 Square Adjustable Optic Medium - Dim-To-Warm

■ 03.4200.GL.LE - Gold

Recessed luminaire with LED light source. 220-240V & dimmable 1-10V power supply included.

Recessed luminaire with LED light source. 220-240V & dimmable 1-10V power supply included.

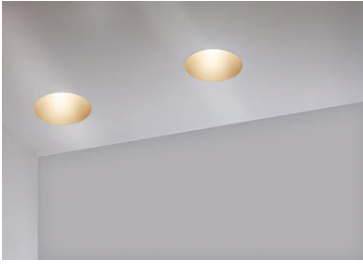


Main specifications

Number of heads	1	Net lumen (lm)	735
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13W	Environment	Indoor dry location
CCT (K)	2850K-1800K		
CRI	95		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	27
Beam angle C90-270 (°)	28
Efficiency (lm/W)	56

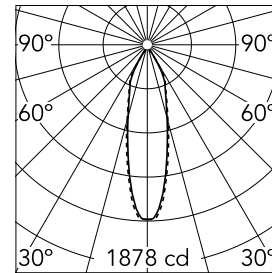

Beam Angle: 27°

h(m)	E(lx)	D(m)
1	1878	0.47
2	470	0.95
3	209	1.42
4	117	1.89
5	75	2.37

Luminous flux luminaire
735 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Driver type	Dimmable 1-10V
Voltage (V)	33.00	Emergency	Without
Current (mA)	300	Insulation class	II
Dimmable	Yes		
Driver	Remote included		

Physical

Color	Gold	Tilt (°)	20
Orientation	Adjustable	Rotation (°)	360
Trim	yes		
Recessed depth (mm)	91		
Weight (kg)	0.24		

Note

For 110V PSU versions, please consult with the front office. Installation frame not necessary. Diffusing lens included.

