



Easy Kap 80 Square Wall-Washer

■ 03.4198.GL - Gold

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

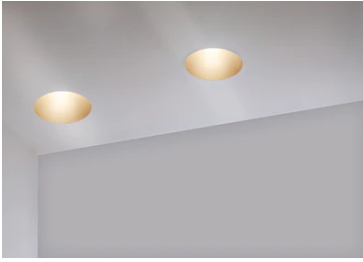


Main specifications

Number of heads	1	Net lumen (lm)	739
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	9.2W	Environment	Indoor
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Indirect, Direct
LED type	LED array
Light distribution	Asymmetric
Optical type	Wall-washer
Beam angle (°)	28
Beam angle C90-270 (°)	30

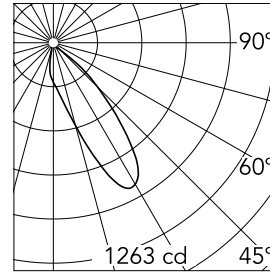

Beam Angle:	28°		
h(m)	E(lx)	D(m)	
1	1263	0.68	
2	316	1.36	
3	140	2.04	
4	79	2.72	
5	51	3.40	

Luminous flux luminaire
739 lm (EXTREME CUT OFF)

Electrical

Voltage (V)	17.80	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI		
Emergency	Without		


Physical

Color	Gold	Spot diameter (mm)	80
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	81		
Weight (kg)	0.24		

Note

Elliptical lens included.

Certification / Marking



Easy Kap 80 Square Wall-Washer



Power supply non dimmable.
Multicurrent 125-500mA; 5,5-22W
60.9160



Continuous current power supply of
13-20W, 110*/240V – 50/60Hz with
power current selected through
adjustable switch. Synchronisation
cables not included.
60.9188



Constant Current Power Supply for
LED. Dimmable DALI. 10-20W
60.8847



Continuous current power supply of
12-20W, 110*/240V – 50/60Hz with
power current selected through
adjustable. Reguable DALI 1 y DALI 2
60.9222



Continuous current power supply,
Mains dimming , 220/240V – 50/60Hz,
10W – 500mA.
60.9411



Power supply Casambi. 21.5W-32W
60.9207