



Easy Kap Ø 105 Wall-Washer

■ 05.7020.CU - Copper

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Installation frame not necessary.

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Installation frame not necessary.

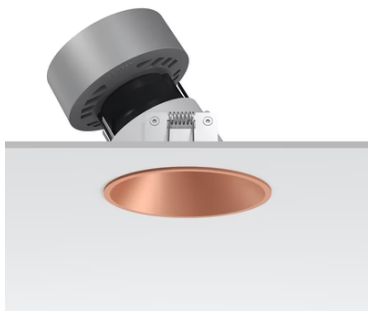

Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	1638
Power (W)	22.8W	Mountings	Ceiling recessed
System power (W)	22.8	Environment	Indoor dry location
CCT (K)	2700K		

Optical


Lighting type	Direct	Beam angle C90-270 (°)	33
LED type	LED array	UGRL	-9
Light distribution	Asymmetric	Efficiency (lm/W)	71.84
Optical type	Wall Washer		
	Down		
Beam angle (°)	26		

Electrical

Voltage (V)	34	Emergency	Without
Current (mA)	650	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V		

Physical

Color	Copper	Spot diameter (mm)	111
Orientation	Fixed	Lifespan (L70 B10)	L80B50
Trim	yes		
Recessed depth (mm)	134		
Weight (kg)	0.53		



Easy Kap Ø 105 Wall-Washer



Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W
60.9439

Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W
700/750/800/900/950/1000/1050mA-38W
60.9186



Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable
60.9592