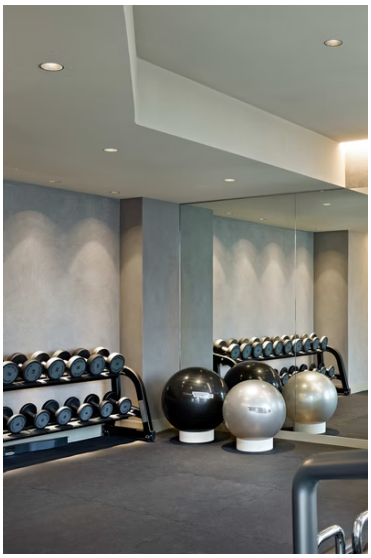



Easy Kap Ø 80 Adjustable

03.4162.B1 - White

Recessed luminaire with main voltage source.Mounting frame not required.

Main specifications

Number of heads	1	**Environment**	Indoor dry location
Lamp category	LED retrofit		
Power (W)	MAX 50W		
System power (W)	50		
Mountings	Ceiling recessed		

Optical

Lighting type	Direct
Lamp type	PAR16
Light distribution	Symmetric

Electrical

Frequency (Hz)	50/60	**Insulation class**	II
Voltage (V)	230		
Current (mA)	-9		
Lamp holder	GZ10		
Emergency	Without		

Physical

Color	White	**Tilt (°)**	20
Orientation	Adjustable	**Rotation (°)**	360
Trim	yes	**Spot diameter (mm)**	80
Recessed depth (mm)	155		
Weight (kg)	0.12		

Note

Not suitable for lens accessories.

IP 23 RETILAP GWT 850°