



## Easy Kap Ø 80 Wall-Washer - Dim-To-Warm

■ 03.4196.BU.LE - Blue

Recessed luminaire with LED light source. 220-240V &amp; dimmable 1-10V power supply included.

Recessed luminaire with LED light source. 220-240V &amp; dimmable 1-10V power supply included.

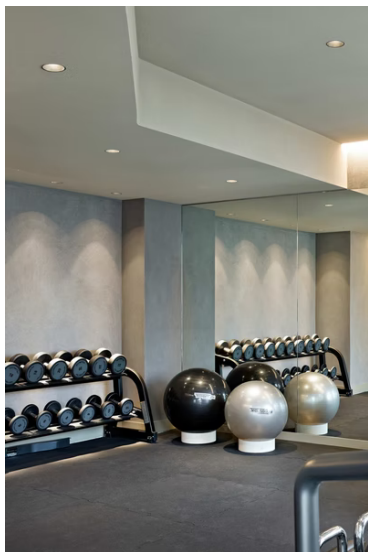


## Main specifications

Number of heads	1	CRI	95
Lamp category	LED	Net lumen (lm)	672
Power (W)	13W	Mountings	Ceiling recessed
System power (W)	13	Environment	Indoor dry location
CCT (K)	2850K-1800K		

## Optical

Lighting type	Indirect, Direct
LED type	LED array
Light distribution	Asymmetric
Optical type	Wall Washer
	Down
Beam angle (°)	28
Beam angle C90-270 (°)	29
UGRL	20
Efficiency (lm/W)	51

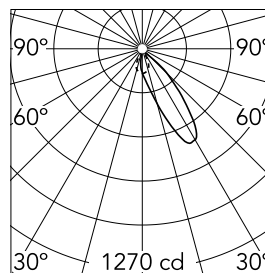

Beam Angle: 28°

	h(m)	E(lx)	D(m)
1	1270	0.65	
2	317	1.30	
3	141	1.96	
4	79	2.61	
5	51	3.26	

Luminous flux luminaire  
672 lm (EXTREME CUT OFF)

## Electrical

Frequency (Hz)	50/60	Driver type	Dimmable 1-10V
Voltage (V)	33	Emergency	Without
Current (mA)	300	Insulation class	II
Dimmable	Yes		
Driver	Remote included		

## Physical

Color	Blue	Spot diameter (mm)	80
Orientation	Fixed	Lifespan (L70 B10)	L80B50
Trim	yes		
Recessed depth (mm)	81		
Weight (kg)	0.24		

## Note

For 110V PSU versions, please consult with the front office. Installation frame not necessary. Diffusing lens included.

