



Easy Kap Ø105 Wall-Washer

■ 05.7020.CU - Copper

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Installation frame not necessary.

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Installation frame not necessary.

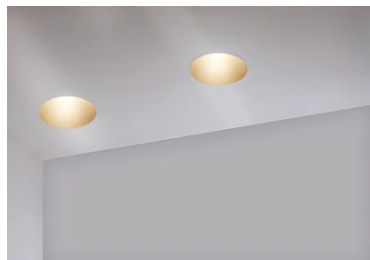

Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	23W	Environment	Indoor
System power (W)	25.9		
CCT (K)	2700K		

Optical

Lighting type	Direct	Beam angle C90-270 (°)	33
LED type	LED array		
Light distribution	Asymmetric		
Optical type	Wall-washer		
Beam angle (°)	26		

Electrical

Voltage (V)	34	Emergency	Without
Current (mA)	650	Insulation class	III
Dimmable	Yes		
Driver	remote excluded		
Driver type	Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI		

Physical

Color	Copper	Spot diameter (mm)	111
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	134		
Weight (kg)	0,53		

Easy Kap Ø105 Wall-Washer



Continuous current supply source of
240V – 50/60Hz with dimmable DALI 2
60.9186



Continuous current power supply, 0/1-
10V dimmable, 220/240V – 50/60Hz,
36W – 700 mA
60.9439



Continuous current power supply,
dimmable Casambi, 220/240V –
50/60Hz, 35W – 650mA / 36W – 700 mA.
60.9207



Continuous current power supply
220/240V – 50/60Hz. Adjustable Current
300mA-13W / 350mA-15W / 400mA-18W
/ 450mA-20W / 500mA-22W / 550mA-
24W / 600mA-27W / 650mA-29W /
700mA-31W / 750mA-32W / 800mA-33W
/ 850mA-35W / 900mA-38W / 950mA-
40W / 1000/1050mA-42W
60.9162