



## Easy Kap Ø105 Wall-Washer

■ 05.7021.BU - Blue

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Installation frame not necessary.

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Installation frame not necessary.

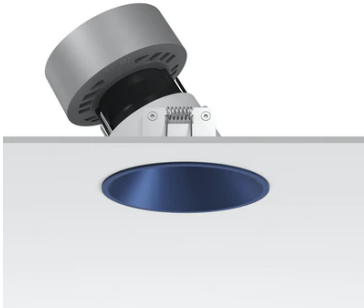

## Main specifications

|                  |       |             |                  |
|------------------|-------|-------------|------------------|
| Number of heads  | 1     | CRI         | 90               |
| Lamp category    | LED   | Mountings   | Ceiling recessed |
| Power (W)        | 23W   | Environment | Indoor           |
| System power (W) | 25.9  |             |                  |
| CCT (K)          | 3000K |             |                  |

## Optical

|                    |             |                        |    |
|--------------------|-------------|------------------------|----|
| Lighting type      | Direct      | Beam angle C90-270 (°) | 34 |
| LED type           | LED array   |                        |    |
| Light distribution | Asymmetric  |                        |    |
| Optical type       | Wall-washer |                        |    |
| Beam angle (°)     | 26          |                        |    |

## Electrical

|              |                                                                                            |                  |         |
|--------------|--------------------------------------------------------------------------------------------|------------------|---------|
| Voltage (V)  | 34                                                                                         | Emergency        | Without |
| Current (mA) | 650                                                                                        | Insulation class | III     |
| Dimmable     | Yes                                                                                        |                  |         |
| Driver       | remote excluded                                                                            |                  |         |
| Driver type  | Electronic,<br>Electronic dimmable,<br>Electronic dimmable 1-10V, Electronic dimmable DALI |                  |         |

## Physical

|                     |       |                    |     |
|---------------------|-------|--------------------|-----|
| Color               | Blue  | Spot diameter (mm) | 111 |
| Orientation         | Fixed |                    |     |
| Trim                | yes   |                    |     |
| Recessed depth (mm) | 134   |                    |     |
| Weight (kg)         | 0,53  |                    |     |

## Easy Kap Ø105 Wall-Washer



---

Continuous current supply source of  
240V – 50/60Hz with dimmable DALI 2  
60.9186



---

Continuous current power supply, 0/1-  
10V dimmable, 220/240V – 50/60Hz,  
36W – 700 mA  
60.9439



---

Continuous current power supply,  
dimmable Casambi, 220/240V –  
50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207



---

Continuous current power supply  
220/240V – 50/60Hz. Adjustable Current  
300mA-13W / 350mA-15W / 400mA-18W  
/ 450mA-20W / 500mA-22W / 550mA-  
24W / 600mA-27W / 650mA-29W /  
700mA-31W / 750mA-32W / 800mA-33W  
/ 850mA-35W / 900mA-38W / 950mA-  
40W / 1000/1050mA-42W  
60.9162