



## Easy Kap Ø80 Adjustable Optic Medium - Dim-To-Warm

■ 03.4171.74.LE - Black

Recessed luminaire with LED light source. 220-240V &amp; dimmable 1-10V power supply included.

Recessed luminaire with LED light source. 220-240V &amp; dimmable 1-10V power supply included.

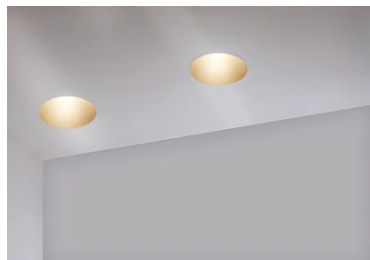


## Main specifications

|                 |             |                |                  |
|-----------------|-------------|----------------|------------------|
| Number of heads | 1           | Net lumen (lm) | 631              |
| Lamp category   | LED         | Mountings      | Ceiling recessed |
| Power (W)       | 13W         | Environment    | Indoor           |
| CCT (K)         | 2850K-1800K |                |                  |
| CRI             | 95          |                |                  |

## Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | LED array |
| Light distribution     | Symmetric |
| Optical type           | Medium    |
| Beam angle (°)         | 28        |
| Beam angle C90-270 (°) | 28        |
| Efficiency (lm/W)      | 48        |



Beam Angle: 28°

|   | h(m) | E(lx) | D(m) |
|---|------|-------|------|
| 1 | 1818 | 0.49  |      |
| 2 | 455  | 0.99  |      |
| 3 | 202  | 1.48  |      |
| 4 | 114  | 1.97  |      |
| 5 | 73   | 2.46  |      |

Luminous flux luminaire  
631 lm (EXTREME CUT OFF)

## Electrical

|                |                              |                  |         |
|----------------|------------------------------|------------------|---------|
| Frequency (Hz) | 50/60                        | Emergency        | Without |
| Voltage (V)    | 33.00                        | Insulation class | II      |
| Dimmable       | Yes                          |                  |         |
| Driver         | Remote                       |                  |         |
| Driver type    | Electronic<br>dimmable 1-10V |                  |         |

## Physical

|                     |            |                    |     |
|---------------------|------------|--------------------|-----|
| Color               | Black      | Tilt (°)           | 20  |
| Orientation         | Adjustable | Rotation (°)       | 360 |
| Trim                | yes        | Spot diameter (mm) | 80  |
| Recessed depth (mm) | 91         |                    |     |
| Weight (kg)         | 0.24       |                    |     |

## Note

For 110V PSU versions, please consult with the front office. Installation frame not necessary. Diffusing lens included.

