



## Easy Kap Ø80 Fixed Optic Flood

03.4298.B1 - White

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

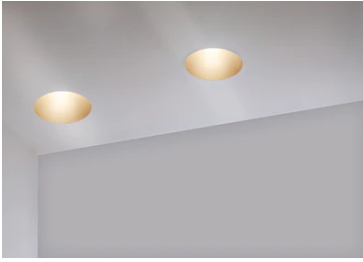


### Main specifications

Number of heads	1	Net lumen (lm)	688
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	9.2W	Environment	Indoor
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	50
Beam angle C90-270 (°)	50

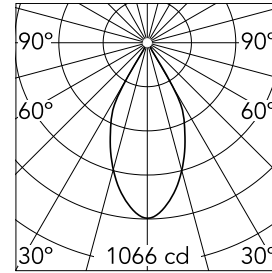

Beam Angle: 50°


h(m)	E(lx)	D(m)
1	1066	0.93
2	266	1.86
3	118	2.79
4	67	3.72
5	43	4.65

Luminous flux luminaire  
688 lm (EXTREME CUT OFF)

### Electrical

Voltage (V)	18.40	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI		
Emergency	Without		

### Certification / Marking



### Physical

Color	White	Spot diameter (mm)	80
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	91		
Weight (kg)	0.24		

### Note

Diffusing lens included

## Easy Kap Ø80 Fixed Optic Flood



---

Power supply non dimmable.  
Multicurrent 125-500mA; 5,5-22W  
60.9160



---

Continuous current power supply of  
13-20W, 110\*/240V – 50/60Hz with  
power current selected through  
adjustable switch. Synchronisation  
cables not included.  
60.9188



---

Constant Current Power Supply for  
LED. Dimmable DALI. 10-20W  
60.8847



---

Continuous current power supply of  
12-20W, 110\*/240V – 50/60Hz with  
power current selected through  
adjustable. Reguable DALI 1 y DALI 2  
60.9222



---

Continuous current power supply,  
Mains dimming , 220/240V – 50/60Hz,  
10W – 500mA.  
60.9411



---

Power supply Casambi. 21.5W-32W  
60.9207