



## Easy Kap Ø80 Fixed Optic Flood - Dim-To-Warm

■ 03.4297.74.LE - Black

Recessed luminaire with LED light source. 220-240V &amp; dimmable 1-10V power supply included.

Recessed luminaire with LED light source. 220-240V &amp; dimmable 1-10V power supply included.

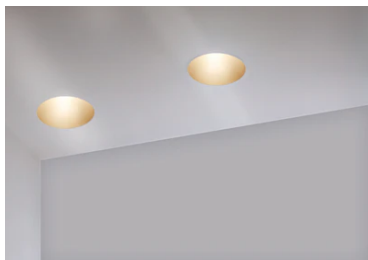


## Main specifications

Number of heads	1	Net lumen (lm)	622
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13W	Environment	Indoor
CCT (K)	2850K-1800K		
CRI	95		

## Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	54
Beam angle C90-270 (°)	54
Efficiency (lm/W)	47

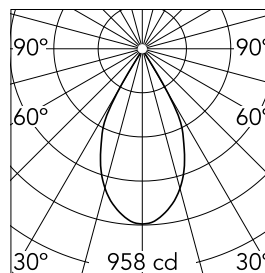

Beam Angle: 54°

h(m)	E(lx)	D(m)
1	958	1.02
2	239	2.04
3	106	3.06
4	60	4.09
5	38	5.11

Luminous flux luminaire  
622 lm (EXTREME CUT OFF)

## Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	33.00	Insulation class	II
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic		
	dimmable 1-10V		

## Physical

Color	Black	Spot diameter (mm)	80
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	91		
Weight (kg)	0.24		

## Note

For 110V PSU versions, please consult with the front office. Installation frame not necessary. Diffusing lens included.

