




## Easy Kap Ø80 Plus Adjustable Optic Flood

■ 05.7405.BU - Blue

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary. Diffusing lens included.

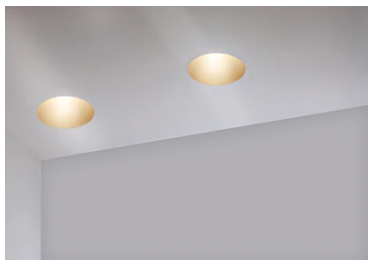


## Main specifications

Number of heads	1	Net lumen (lm)	906
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13.4W	Environment	Indoor
CCT (K)	3000K		
CRI	90		

## Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	54
Beam angle C90-270 (°)	54
Efficiency (lm/W)	67



Beam Angle: 54°

h(m)	E(lx)	D(m)
1	1414	1.01
2	353	2.03
3	157	3.04
4	88	4.05
5	57	5.07

Luminous flux luminaire  
906 lm (EXTREME CUT OFF)

## Electrical

Voltage (V)	17,8	Emergency	Without
Current (mA)	700	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable, Electronic dimmable 1- 10V, Electronic dimmable DALI		

## Physical

Color	Blue	Tilt (°)	20
Orientation	Adjustable	Rotation (°)	360
Trim	yes	Spot diameter (mm)	80
Recessed depth (mm)	150		
Weight (kg)	0,241		

## Easy Kap Ø80 Plus Adjustable Optic Flood



---

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch.  
60.9592



---

Continuous current power supply of 13-20W, 110\*/240V – 50/60Hz with power current selected through adjustable switch. 1-10V or push dimming.  
60.9188



---

Constant Current Power Supply for LED. Dimmable DALI. 10-20W  
60.8847



---

Continuous current power supply of 12-20W, 110\*/240V – 50/60Hz with power current selected through adjustable. Regulable DALI 1 y DALI 2  
60.9222



---

Continuous current power supply, Mains dimming 220/240V – 50/60Hz, 12-20W  
60.9467



---

Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207