




## Easy Kap Ø80 Plus Fixed Optic Flood

■ 05.7447.BU - Blue

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary. Diffusing lens included.

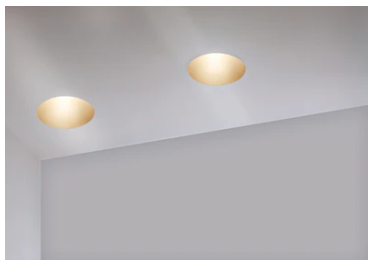


## Main specifications

|                 |       |                |                  |
|-----------------|-------|----------------|------------------|
| Number of heads | 1     | Net lumen (lm) | 895              |
| Lamp category   | LED   | Mountings      | Ceiling recessed |
| Power (W)       | 13.4W | Environment    | Indoor           |
| CCT (K)         | 2700K |                |                  |
| CRI             | 90    |                |                  |

## Optical

|                        |                 |
|------------------------|-----------------|
| LED type               | LED array       |
| Light distribution     | Symmetric Flood |
| Optical type           | Flood           |
| Beam angle (°)         | 53              |
| Beam angle C90-270 (°) | 53              |
| Efficiency (lm/W)      | 66              |



Beam Angle: 53°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 1410  | 1.00 |
| 2    | 352   | 2.01 |
| 3    | 157   | 3.01 |
| 4    | 88    | 4.02 |
| 5    | 56    | 5.02 |

Luminous flux luminaire  
895 lm (EXTREME CUT OFF)

## Electrical

|              |                                                                                            |                  |         |
|--------------|--------------------------------------------------------------------------------------------|------------------|---------|
| Voltage (V)  | 17,8                                                                                       | Emergency        | Without |
| Current (mA) | 700                                                                                        | Insulation class | III     |
| Dimmable     | Yes                                                                                        |                  |         |
| Driver       | Remote                                                                                     |                  |         |
| Driver type  | Electronic,<br>Electronic dimmable,<br>Electronic dimmable 1-10V, Electronic dimmable DALI |                  |         |

## Physical

|                     |       |                    |    |
|---------------------|-------|--------------------|----|
| Color               | Blue  | Spot diameter (mm) | 80 |
| Orientation         | Fixed |                    |    |
| Trim                | yes   |                    |    |
| Recessed depth (mm) | 150   |                    |    |
| Weight (kg)         | 0,241 |                    |    |

## Easy Kap Ø80 Plus Fixed Optic Flood



---

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch.  
60.9592



---

Continuous current power supply of 13-20W, 110\*/240V – 50/60Hz with power current selected through adjustable switch. 1-10V or push dimming.  
60.9188



---

Constant Current Power Supply for LED. Dimmable DALI. 10-20W  
60.8847



---

Continuous current power supply of 12-20W, 110\*/240V – 50/60Hz with power current selected through adjustable. Regulable DALI 1 y DALI 2  
60.9222



---

Continuous current power supply, Mains dimming 220/240V – 50/60Hz, 12-20W  
60.9467



---

Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207