




## Easy Kap Ø80 Plus Wall-Washer

05.7435.B1 - White

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary. Elliptical lens included.

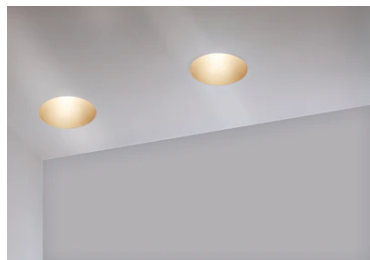


## Main specifications

Number of heads	1	Net lumen (lm)	884
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13.4W	Environment	Indoor
CCT (K)	2700K		
CRI	90		

## Optical

LED type	LED array
Light distribution	Asymmetric
Optical type	Wall-washer
Beam angle (°)	28
Beam angle C90-270 (°)	37
Efficiency (lm/W)	65

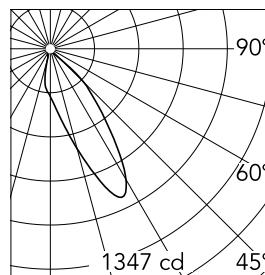

Beam Angle: 28°

h(m)	E(lx)	D(m)
1	1347	0.62
2	337	1.24
3	150	1.87
4	84	2.49
5	54	3.11

Luminous flux luminaire  
884 lm (EXTREME CUT OFF)

## Electrical

Voltage (V)	17,8	Emergency	Without
Current (mA)	700	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable, Electronic dimmable 1- 10V, Electronic dimmable DALI		

## Physical

Color	White	Spot diameter (mm)	80
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	140		
Weight (kg)	0,241		

## Easy Kap Ø80 Plus Wall-Washer



Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch.  
60.9592



Continuous current power supply of 13-20W, 110\*/240V – 50/60Hz with power current selected through adjustable switch. 1-10V or push dimming.  
60.9188



Constant Current Power Supply for LED. Dimmable DALI. 10-20W  
60.8847



Continuous current power supply of 12-20W, 110\*/240V – 50/60Hz with power current selected through adjustable. Regurable DALI 1 y DALI 2  
60.9222



Continuous current power supply, Mains dimming 220/240V – 50/60Hz, 12-20W  
60.9467



Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207