
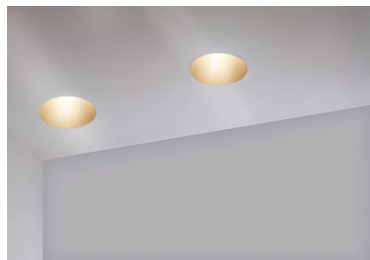


**Easy Kap Ø80 Wall-Washer - Dim-To-Warm****03.4196.74.LE - Black**

Recessed luminaire with LED light source. 220-240V &amp; dimmable 1-10V power supply included.


Recessed luminaire with LED light source. 220-240V &amp; dimmable 1-10V power supply included.

**Main specifications**

Number of heads	1	Net lumen (lm)	682
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13W	Environment	Indoor
CCT (K)	2850K-1800K		
CRI	95		

**Optical**

Lighting type	Indirect, Direct
LED type	LED array
Light distribution	Asymmetric
Optical type	Wall-washer
Beam angle (°)	28
Beam angle C90-270 (°)	27
Efficiency (lm/W)	52

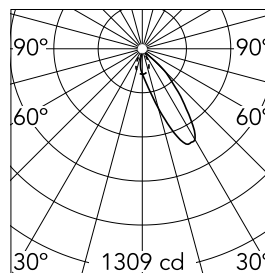

Beam Angle: 28°

	h(m)	E(lx)	D(m)
1	1309	0.64	
2	327	1.28	
3	145	1.92	
4	82	2.56	
5	52	3.20	

Luminous flux luminaire  
682 lm (EXTREME CUT OFF)**Electrical**

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	33.00	Insulation class	II
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic		
	dimmable 1-10V		

**Physical**

Color	Black	Spot diameter (mm)	80
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	81		
Weight (kg)	0.24		

**Note**

For 110V PSU versions, please consult with the front office. Installation frame not necessary. Diffusing lens included.

