



## Easy Kap Ø80 Wall-Washer - Dim-To-Warm

 **03.4196.CU.LE - Copper**

Recessed luminaire with LED light source. 220-240V & dimmable 1-10V power supply included.

Recessed luminaire with LED light source. 220-240V & dimmable 1-10V power supply included.

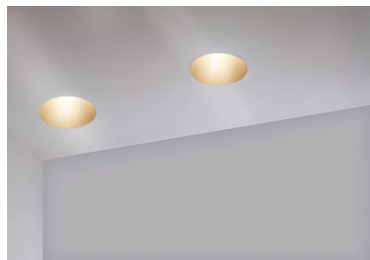


## Main specifications

Number of heads	1	Net lumen (lm)	712
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13W	Environment	Indoor
CCT (K)	2850K-1800K		
CRI	95		

## Optical

Lighting type	Indirect, Direct
LED type	LED array
Light distribution	Asymmetric
Optical type	Wall-washer
Beam angle (°)	27
Beam angle C90-270 (°)	43
Efficiency (lm/W)	54

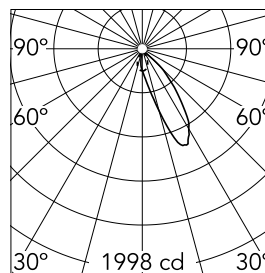

Beam Angle: 27°

	h(m)	E(lx)	D(m)
1	1998	0.60	
2	500	1.20	
3	222	1.80	
4	125	2.40	
5	80	3.00	

Luminous flux luminaire  
712 lm (EXTREME CUT OFF)

## Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	33.00	Insulation class	II
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic		
	dimmable 1-10V		

## Physical

Color	Copper	Spot diameter (mm)	80
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	81		
Weight (kg)	0.24		

## Note

For 110V PSU versions, please consult with the front office. Installation frame not necessary. Diffusing lens included.

