


Feed 90° Corner

■ 06.1656.14 - Black

Can be powered. Includes 2 cable suspension kits.



Main specifications

Mountings	Suspension
Environment	Indoor dry location

Electrical



Voltage (V)	24.00
Driver	Remote excluded
Driver type	Non Dimmable, Dimmable, Casambi, Dimmable DALI
Emergency	1 Without

Physical

Color	Black
Weight (kg)	0.76
Length (mm)	153




Feed 90° Corner

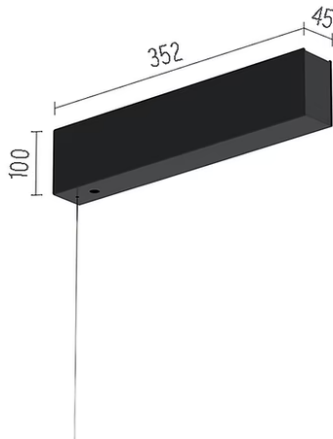

Surface rose
08.8883.14A

DALI controller and 24V/185W
equipment to supply and control both
the direct and indirect lighting,
included
08.8886.14.DA

LED power supply source for remote
installation in 24V/200W electric
control panel. To avoid problems of
overload it is recommended to install a
power source every 185W. 100/240V.
60.9352

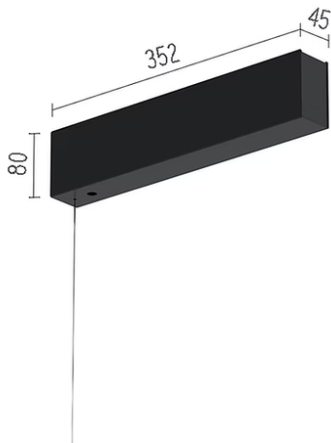

Surface power supply for direct and
indirect lighting with housing for the
driver
08.8886.14

Endcap. 2 unit kit
08.8887.14A

Recessed power supply rose
08.8889.14