

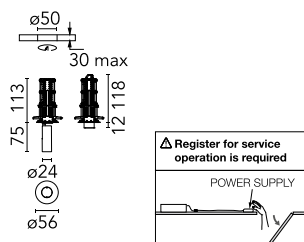


## Find Me 0 Mono Point (Trim/No Trim)

09.3781.06 - Chrome

Recessed adjustable luminaire for indoor application. Remote power supply 250 mA not included.

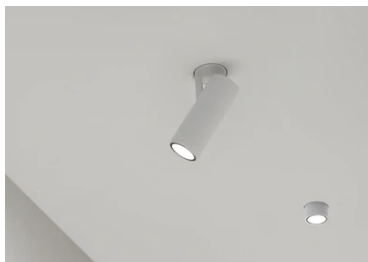


## Main specifications

Number of heads	1	Net lumen (lm)	170
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	3W	Environment	Indoor
CCT (K)	2700K		
CRI	90		

## Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	26
Beam angle C90-270 (°)	26

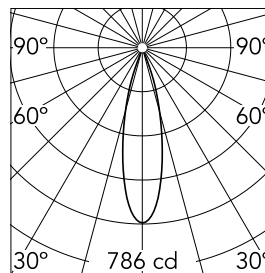

Beam Angle: 26°

h(m)	E(lx)	D(m)
1	786	0.45
2	197	0.91
3	87	1.36
4	49	1.82
5	31	2.27

Luminous flux luminaire  
170 lm (EXTREME CUT OFF)

## Electrical

Voltage (V)	12.00	Emergency	Without
Current (mA)	250	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable 1- 10V, Electronic dimmable DALI		

## Physical

Color	Chrome	Rotation (°)	360
Orientation	Adjustable	Spot diameter (mm)	24
Recessed depth (mm)	118		
Weight (kg)	0.14		
Tilt (°)	70		

## Note

Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place. It is not recommended to use dimmable drivers of several brands due to the specific dimming curves of each brand.

## Find Me 0 Mono Point (Trim/No Trim)



Constant voltage supply source of 10W, 100-240V – 50/60Hz with non adjustable 250 mA supply voltage  
60.9389



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.  
60.8847



Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2  
60.9222




Constant voltage supply source of 20W, 100-240V – 50/60Hz with adjustable 250 mA supply voltage. Dimmable 0-10V  
60.9405



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W  
60.9160



Continuous current power supply, Mains dimming, leading & trailing edge 220/240V – 50/60Hz, 300mA-14W / 350mA-17W / 400mA-19W / 450/500/600/650/700/750/800/900mA – 20W  
60.9467



---

Casambi Controller 220-240V. Remote  
Installation  
60.9392