

## Find Me 0 Mono Point (Trim/No Trim)

■ 09.3781.14A - Black

Recessed adjustable luminaire for indoor application. Remote power supply 250 mA not included.




### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	170
<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling recessed
<b>Power (W)</b>	3W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	2700K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Medium
<b>Beam angle (°)</b>	26
<b>Beam angle C90-270 (°)</b>	26

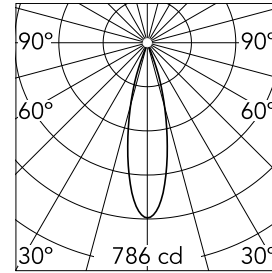

<b>Beam Angle:</b>	26°		
	<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>
1	786	0.45	
2	197	0.91	
3	87	1.36	
4	49	1.82	
5	31	2.27	

Luminous flux luminaire  
170 lm (EXTREME CUT OFF)

### Electrical



<b>Voltage (V)</b>	12	<b>Emergency</b>	Without
<b>Current (mA)</b>	250	<b>Insulation class</b>	III
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote excluded		
<b>Driver type</b>	Non Dimmable, Dimmable DALI 2, Dimmable 0-10V, Dimmable Casambi, Dimmable DALI 1, Mains Cut Dimming		

### Physical

<b>Color</b>	Black	<b>Rotation (°)</b>	360
<b>Orientation</b>	Adjustable	<b>Spot diameter (mm)</b>	24
<b>Recessed depth (mm)</b>	118		
<b>Weight (kg)</b>	0.14		
<b>Tilt (°)</b>	70		

### Note

Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place. It is not recommended to use dimmable drivers of several brands due to the specific dimming curves of each brand. To use only one driver for various spots, connect the spots in series.

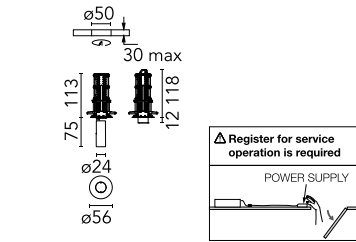

## Find Me 0 Mono Point (Trim/No Trim)



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W  
60.9160

Continuous current power supply. 220/240V – 50/60Hz. Adjustable Current 150 mA – 7,2W / 200 mA – 9,5W / 250 mA – 12W / 300 mA -14,5W / 350 mA -17W/400 mA – 19,5W / 450 mA -21,5W / 500 mA – 24W. Mains or push dimming  
60.9421

Constant voltage supply source of 20W, 100-240V – 50/60Hz with adjustable 250 mA supply voltage. Dimmable DALI  
60.9601



Constant voltage supply source of 20W, 100-240V – 50/60Hz with adjustable 250 mA supply voltage. Dimmable 0-10V  
60.9405

Casambi Controller 220-240V. Remote Installation  
60.9392

Constant voltage supply source of 10W, 100-240V – 50/60Hz with non adjustable 250 mA supply voltage  
60.9389