


Find Me 1 Mono Point (Trim/No Trim)

■ 09.3751.06 - Chrome

Recessed adjustable luminaire for indoor application. Remote power supply 500 mA not included.

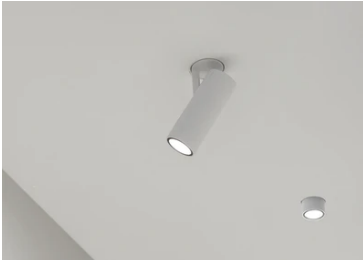


Main specifications

| | | | |
|------------------------|-------|-----------------------|------------------|
| Number of heads | 1 | Net lumen (lm) | 344 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 6W | Environment | Indoor |
| CCT (K) | 2700K | | |
| CRI | 90 | | |

Optical

| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Spot |
| Beam angle (°) | 14 |
| Beam angle C90-270 (°) | 14 |

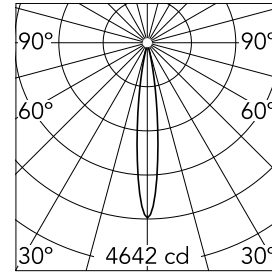

| | | | |
|--------------------|--------------|-------------|--|
| Beam Angle: | 14° | | |
| h(m) | E(lx) | D(m) | |
| 1 | 4642 | 0.24 | |
| 2 | 1160 | 0.48 | |
| 3 | 516 | 0.72 | |
| 4 | 290 | 0.95 | |
| 5 | 186 | 1.19 | |

Luminous flux luminaire
344 lm (EXTREME CUT OFF)

Electrical


| | | | |
|--------------------|-----------------------------------------------------------------------|-------------------------|-----|
| Voltage (V) | 12.00 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote | | |
| Driver type | Electronic, Electronic dimmable 1-10V, Electronic dimmable DALI | | |
| Emergency | Without | | |

Physical

| | | | |
|----------------------------|------------|---------------------------|-----|
| Color | Chrome | Rotation (°) | 360 |
| Orientation | Adjustable | Spot diameter (mm) | 35 |
| Recessed depth (mm) | 137 | | |
| Weight (kg) | 0.23 | | |
| Tilt (°) | 70 | | |

Note

Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place.

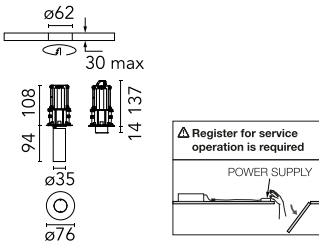

Find Me 1 Mono Point (Trim/No Trim)



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W
60.9160



Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207



Continuous current power supply, 1-10V, regulable Mains, leading & trailing edge 220/240V – 50/60Hz, 500mA – 10W
60.9411



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.
60.8847



Continuous current power supply of 6W, 100V / 14W, 240V – 50/60Hz with 500 mA supply voltage
60.8880



Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming
60.9188



Continuous current power supply of
12-20W, 110/240V – 50/60Hz with power
current selected through adjustable
350mA – 17W / 400mA – 19W / 450 / 550
/ 600 / 700mA – 20W regulable Dali 1 y
Dali 2
60.9222