
Recessed Indoor dry location











In-Finity 100 Recessed No Trim Dihedral Corner 3000K Micro-Prismatic Diffuser Dali

N10NDC3U30BDA - White


LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Main specifications

Number of heads	1	Net lumen (lm)	
Lamp category	LED	Mountings	
Power (W)	25.5W/m	Environment	
CCT (K)	3000K		
CPI	90		

Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	73
Beam angle C90-270 (°)	81
•	



Insulation class

Beam Angle:	
E(lx)	D(m)
1757	1.47
439	2.95
195	4.42
110	5.90
70	7.37
	E(lx) 1757 439 195 110

_		
	lectrica	

Frequency (Hz) Dimmable	50/60 Yes
Driver	Integrated
Driver type	Dimmable DALI
	1

Emergency Without


Physical

Color	White
Orientation	Fixed
Recessed depth (mm)	135
Weight (kg)	8.20

Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 100 Recessed No Trim Dihedral Corner 3000K Micro-Prismatic Diffuser Dali

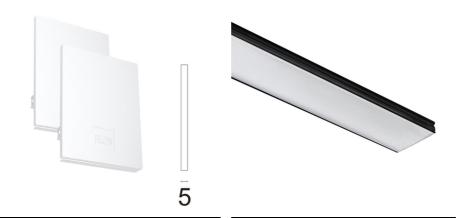

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 100 mm (Colour White) 08.9054.40 500 mm micro-prismatic diffuser. Highly efficient multilayer diffuser that, thanks to its unique microprismatic texture, provides a glare free UGR<19 light beam 08.0114.00