

## In-Finity 100 Recessed Trim Emergency 4000K Micro-Prismatic Diffuser

### ■ N10TEM4U02B - Anodized Grey

LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

### Main specifications

|                      |          |                    |                     |
|----------------------|----------|--------------------|---------------------|
| <b>Lamp category</b> | LED      | <b>Environment</b> | Indoor dry location |
| <b>Power (W)</b>     | 25.5W/m  |                    |                     |
| <b>CCT (K)</b>       | 4000K    |                    |                     |
| <b>CRI</b>           | 80       |                    |                     |
| <b>Mountings</b>     | Recessed |                    |                     |

### Optical

|                           |                |
|---------------------------|----------------|
| <b>Lighting type</b>      | Direct         |
| <b>LED type</b>           | Top LED        |
| <b>Light distribution</b> | Symmetric      |
| <b>Optical type</b>       | Diffused light |

### Electrical





|                         |              |
|-------------------------|--------------|
| <b>Dimmable</b>         | No           |
| <b>Driver</b>           | Integrated   |
| <b>Driver type</b>      | Non Dimmable |
| <b>Emergency</b>        | Without      |
| <b>Insulation class</b> | I            |

### Physical

|                            |               |
|----------------------------|---------------|
| <b>Color</b>               | Anodized Grey |
| <b>Orientation</b>         | Fixed         |
| <b>Recessed depth (mm)</b> | 135           |
| <b>Length (mm)</b>         | 1400          |

### Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

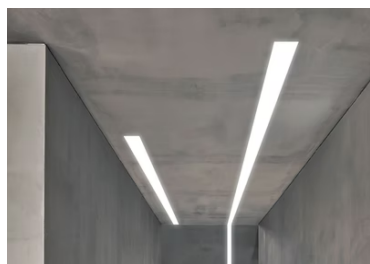

## In-Finity 100 Recessed Trim Emergency 4000K Micro-Prismatic Diffuser



5

Metal cover. Recessed Trim. 100 mm  
(Colour Black)  
08.9055.NS



500 mm micro-prismatic diffuser.  
Highly efficient multilayer diffuser  
that, thanks to its unique  
microprismatic texture, provides a  
glare free UGR<19 light beam  
08.0114.00



5

Metal cover. Recessed Trim. 100 mm  
(Colour Anodized Grey)  
08.9055.02



5

Metal cover. Recessed Trim. 100 mm  
(Colour White)  
08.9055.40